



Apron Pan Conveyor Belt

/ Collaborate / Create / Convey

FLUENT CONVEYORS, LLC / WWW.FLUENTCONVEYORS.COM



(866)764-2980 / SALES@FLUENTCONVEYORS.COM / ©COPYRIGHT




Copyright

The Document and its content is copyright of Fluent Conveyors LLC – © Fluent Conveyors LLC. All rights reserved. Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- You may print or download to a local hard disk extracts for your personal and non-commercial use only.
- You may copy the content to individual third parties for their personal use, but only if you acknowledge Fluent Conveyors LLC as the source of the material.

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may transmit it or store it in any form of electronic retrieval system.

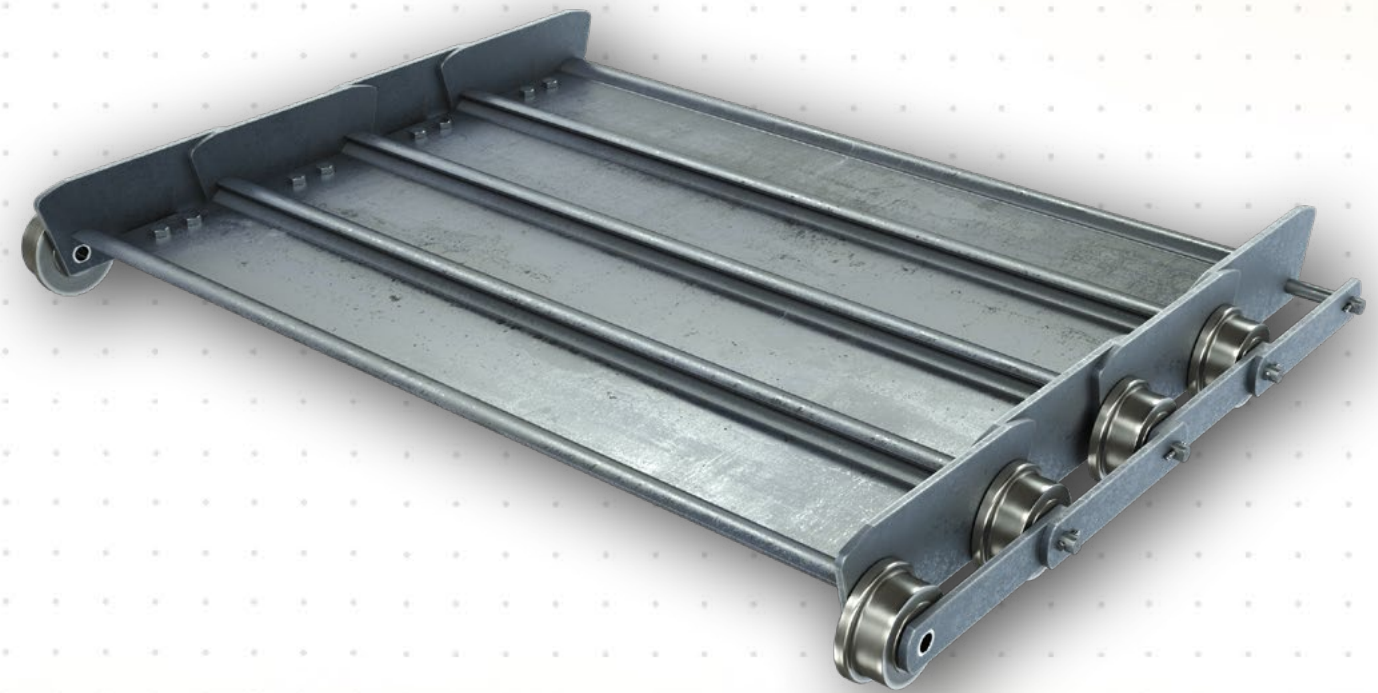


Apron Pan Replacement Conveyor Belts


/ Collaborate / Create / Convey

Fluent Apron Pan conveyor belts are designed to make system maintenance as easy as possible. Made to be heavy-duty, high impact, high temperature resistant belts that are ideal to be used in recycling, slag handling, ferrous and non-ferrous, mixed solid waste, mining, foundry, sheared scrap, refuge, glass and many other robust and extreme applications. These are better suited with fines verses z-pans. These belts do all the heavy lifting.

Apron Pan belts come in 6", 9" and 12-inch pitch options up to 108" wide. 1/4" - 1/2" Thick Precision formed beaded apron style pans, precision die punched wings, single flanged and sintered steel rollers, solid locking pins and add-on options such as cleats, upgraded chain, C-channel backing, larger rollers and more. So you're never out of options.

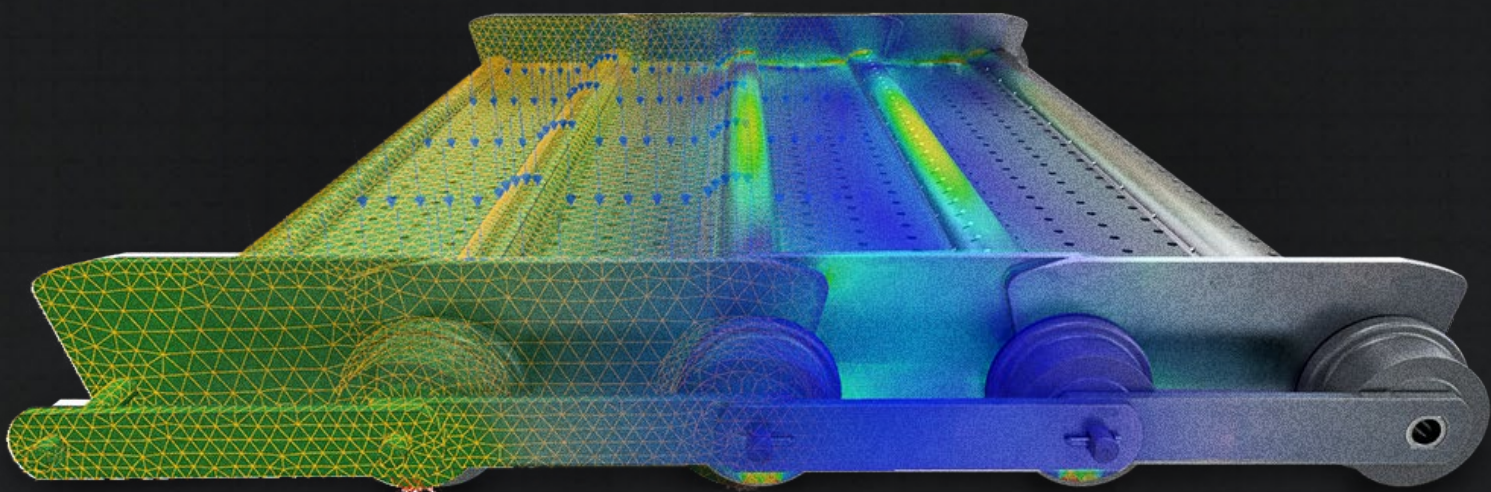

Solutions / Replacement Belt Parts



Hardened Sintered Rollers



Assembled Apron
Pan Section



C1045 Precision Chain



Heavy Duty
C-Channel Backing



1/4" or 3/8" Thick
Coped Angle Cleats

Key Features

HEAVY DUTY FORMED PANS

SOLID MACHINED BUSHINGS

OPTIONAL C-CHANNEL REINFORCEMENT

DOUBLE ROW SIDE BARS

FORMED PLATE SUPPORT ANGLES


COTTER PINS

HARDENED SINTERED ROLLERS

EXTENDED INNER SIDE BAR STAGGERED

HEADED STUB PINS

HEAVY DUTY IMPACT PADS

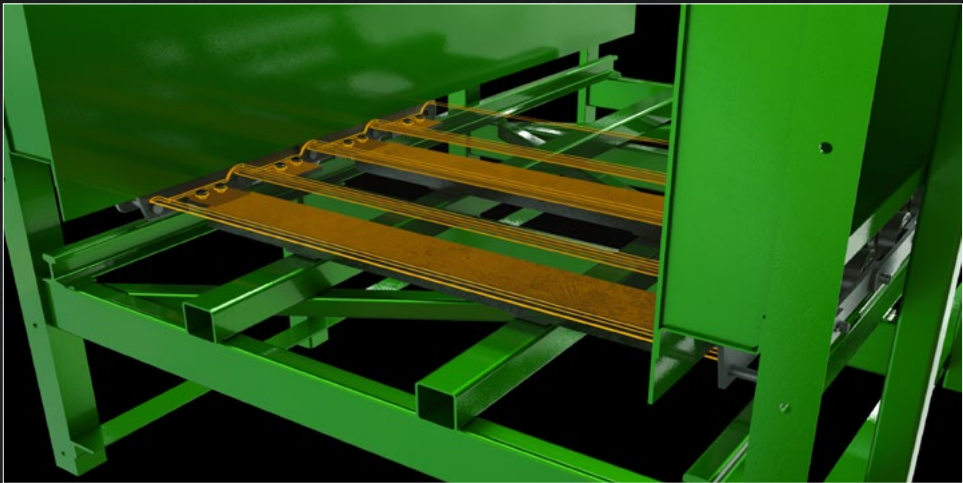


Heavy Duty Formed Pans

High impact, durable formed pans to help increase longevity and decrease deformation. Fluent Conveyors offers 1/4", 3/8" up to 1/2" custom formed apron pans. Max widths up to 120" wide.



Solid Machined Bushings

Low friction, increased life cycle 0.76" - 1.0" ID x 1.12"-1.38" OD Long 1018 Solid, Machined Bushing. Carburized, hardened RC55-60, press fit into inner side bars.

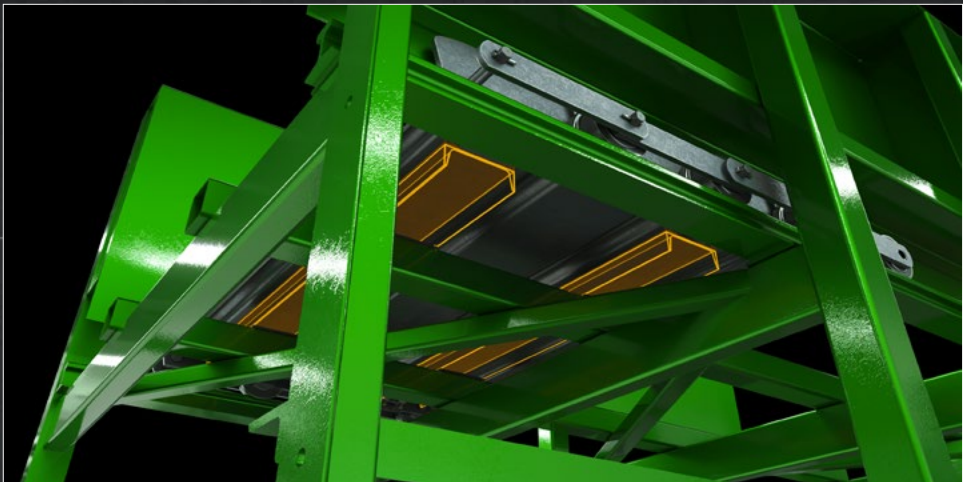

Optional C-Channel Reinforcements

Cross rigid to increase load capacity on the pans and help absorb impact. C 3" x 5# up C 6" x 8.2# heavy duty channel every other pitch.



Double Row Side Bars

Increases strength, reduces failure points and offsets the chain pull. 2" x 1/4" thick C1045 precision die-punched sidebar. Additions include 2" x 3/8" thick and 2-1/2" x 1/2" thick.

Key Features

HEAVY DUTY FORMED PANS

SOLID MACHINED BUSHINGS

OPTIONAL C-CHANNEL REINFORCEMENT

DOUBLE ROW SIDE BARS

FORMED PLATE SUPPORT ANGLES


COTTER PINS

HARDENED SINTERED ROLLERS

EXTENDED INNER SIDE BAR STAGGERED

HEADED STUB PINS

HEAVY DUTY IMPACT PADS

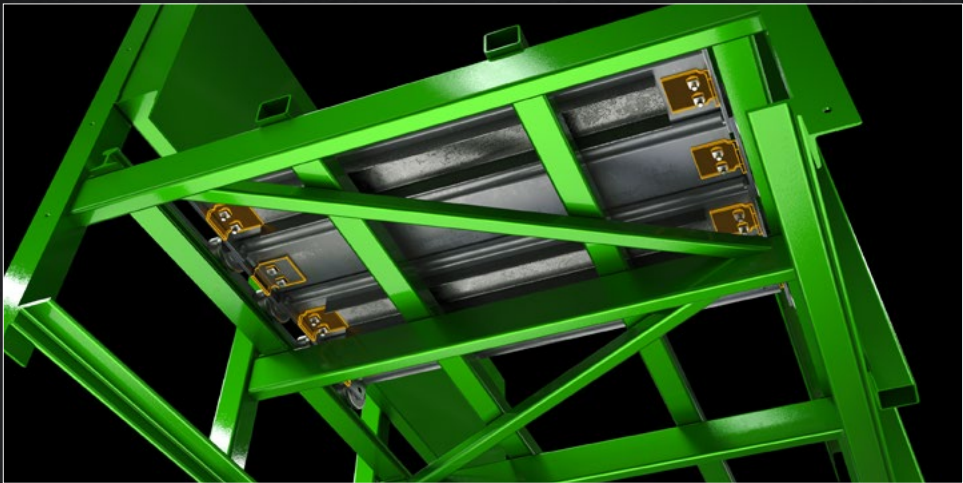

Formed Plate Support Angles

Pan mounting $\frac{3}{8}$ " thick angles to provide simple replacement of sections of belt.




Cotter Pins

Easy maintenance of chain and to secure the rods to the rollers. Optional solid locking pins.



Hardened Sintered Rollers

Increased wear, long lasting and reduction in friction. Flanged and hardened steel wheel in 2- $\frac{1}{16}$ ", 3", 3- $\frac{1}{2}$ ", 4" and 5" diameter options.

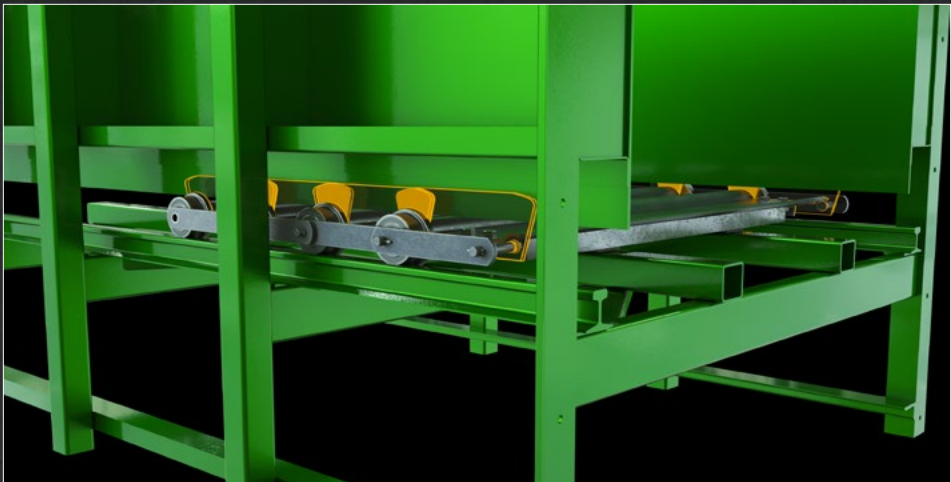

Extended Inner Side Bar Staggered

Sealed protection to remove material flow to the chain and rollers. 4", 5" and 6" high precision die punched wing, $\frac{3}{8}$ " thick staggered wing style, wings are part of chain, $\frac{3}{8}$ " tab punched and welded to chain for attaching pans.

Key Features

HEAVY DUTY FORMED PANS

SOLID MACHINED BUSHINGS

OPTIONAL C-CHANNEL REINFORCEMENT

DOUBLE ROW SIDE BARS

FORMED PLATE SUPPORT ANGLES

COTTER PINS

HARDENED SINTERED ROLLERS

EXTENDED INNER SIDE BAR STAGGERED

HEADED STUB PINS

HEAVY DUTY IMPACT PADS



Headed Stub Pins

Seamless chain rotation and low friction during heavy loads. 4142 precision headed machined and heat-treated alloy pin. See options pages for all options. 3/4" diameter up to 1" diameter pins to connect chain.



Heavy Duty Impact Pads

Reduction in overall pan deflection to ensure longevity and maintain belt alignment. Custom number of rows, 1/4", 3/8", 1/2" & 1" thick formed impact shoes every other pitch.

The Fluent Conveyors Product Family

/ Collaborate / Create / Convey



Heavy Duty Roller Chain
Conveyors




Light Duty Roller Chain
Conveyors




Trough Idler
Conveyors



Slider Bed
Conveyors

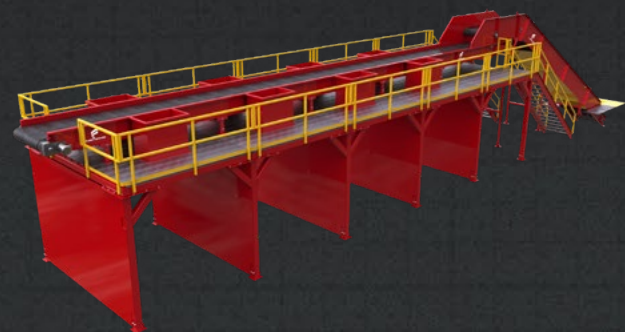


Standard Sort Systems

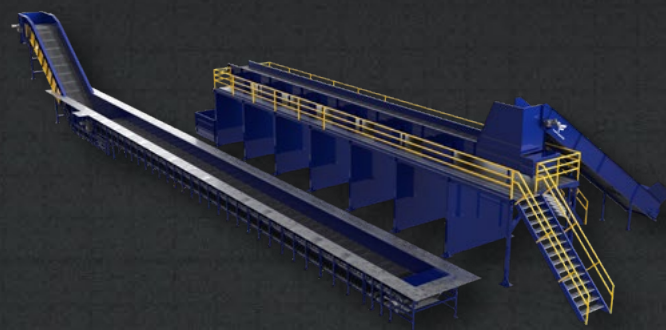

Custom Sort Systems



Package Handling
Conveyors

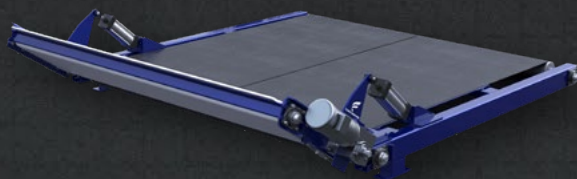

Custom Conveyors

Technical Specifications & Belt Modification Options

Please note not all belts can be configured with each option.

Width Options	<ul style="list-style-type: none">• 48"• 60"• 72"	<ul style="list-style-type: none">• 84"• 96"• 108"	<ul style="list-style-type: none">• Custom widths from 36" up to 120" width with all increments within that range.
Cleat Options	<ul style="list-style-type: none">• 2"• 3"	<ul style="list-style-type: none">• 4"	<ul style="list-style-type: none">• ¼" – ⅜" thick angle.• Flat bar cleats also available.
Pitch Options	<ul style="list-style-type: none">• 6"	<ul style="list-style-type: none">• 9"	
Pan Thickness	<ul style="list-style-type: none">• ¼"	<ul style="list-style-type: none">• ⅜"	<ul style="list-style-type: none">• ½"
Side Wing Height	<ul style="list-style-type: none">• 3"• 4"	<ul style="list-style-type: none">• 5"	<ul style="list-style-type: none">• 6"
Chain Pull	<ul style="list-style-type: none">• 6,000#• 9,000#	<ul style="list-style-type: none">• 13,000#• 14,000#	<ul style="list-style-type: none">• 25,000#
Side Bars Thickness	<ul style="list-style-type: none">• ¼"• ⅜"	<ul style="list-style-type: none">• ½"	
Hardened Bushing Sizes	<ul style="list-style-type: none">• 0.76"-1.0" ID x 1.12"-1.38" OD		
Pin Diameter Options	<ul style="list-style-type: none">• ¾"	<ul style="list-style-type: none">• 1"	
Roller Diameter Options	<ul style="list-style-type: none">• 2-1/16"• 3-1/2"	<ul style="list-style-type: none">• 3"• 4"	<ul style="list-style-type: none">• 5"
Custom Modifications	C-Channel, no wings, top impact pads, formed trapezoids, inverted angle (used for keeping hot material off the belt).		

Replacement Apron Pan Roller Chain Conveyor Belt

Step A: Belt Specs (see page 12)

1	Pan Thickness	inches	mm
2	Belt Width (Inside Sealing Wings)	inches	mm
3	Belt Width (Overall Width)	inches	mm
4	Roller Spacing	inches	mm
5	Belt Length	inches	mm

Step C: Side Bar Specs (see page 14)

10	Chain Pitch	inches	mm
11	Side Bar Width	inches	mm
12	Side Bar Thickness	inches	mm
13	Single Or Double Row	inches	mm

Step B: Roller Specs (see page 13)

6	Roller Diameter	inches	mm
7	Flange Roller Diameter (If Applicable)	inches	mm
8	Roller Width	inches	mm
9	Overall Roller Width (Includes Flanged Roller)	inches	mm

Step D: Sealing Wings Specs (see page 15)

14	Sealing Wing Height	inches	mm
15	Sealing Wing Thickness	inches	mm

Step E: Cleat Specs (see page 16)

16	Height Of Cleat (Angle Iron Shown)	inches	mm
17	Thickness Of Cleat	inches	mm
18	Total Length	inches	mm
19	Offset From Sealing Wing	inches	mm

Step F: Belt Underside Support Specs (see page 17)

20	Support Type / Size (C-Channel Shown)	inches	mm
21	Support Spacing (Every Other Pitch Shown)	inches	mm
22	Support Length	inches	mm

Step G: Belt Underside Support Specs (see page 18)

23	Wear Pad Thickness	inches	mm
24	Wear Pad Quantity (Two Per Pitch Shown)	inches	mm
25	Wear Pad Spacing	inches	mm
26	Wear Pad Location	inches	mm
27	Wear Pad Size	inches	mm

APRON PAN BELT COMPONENT OVERVIEW

STEP E

CLEAT SPECS NEEDED (IF APPLICABLE):

- 16: HEIGHT OF CLEAT (ANGLE IRON SHOWN)
- 17: THICKNESS OF CLEAT
- 18: TOTAL LENGTH
- 19: OFFSET FROM SEALING WING

STEP D

SEALING WINGS SPECS NEEDED (IF APPLICABLE):

- 14: SEALING WING HEIGHT
- 15: SEALING WING THICKNESS

STEP C

SIDE BARS SPECS NEEDED:

- 10: CHAIN PITCH
- 11: SIDE BAR WIDTH
- 12: SIDE BAR THICKNESS
- 13: SINGLE OR DOUBLE ROW

STEP A

BELT SPECIFICATIONS NEEDED:

- 1: PAN THICKNESS
- 2: BELT WIDTH (INSIDE SEALING WINGS)
- 3: BELT WIDTH (OVERALL WIDTH)
- 4: ROLLER SPACING
- 5: BELT LENGTH

STEP G

BELT UNDERSIDE WEAR PADS SPECS NEEDED (IF APPLICABLE):

- 23: WEAR PAD THICKNESS
- 24: WEAR PAD QUANTITY (TWO PER PITCH SHOWN)
- 25: WEAR PAD SPACING
- 26: WEAR PAD LOCATION
- 27: WEAR PAD SIZE

STEP B


ROLLER SPECS NEEDED:

- 6: ROLLER DIAMETER
- 7: FLANGED ROLLER DIAMETER (IF APPLICABLE)
- 8: ROLLER WIDTH
- 9: OVERALL ROLLER WIDTH (INCLUDES FLANGED ROLLER)

STEP F

BELT UNDERSIDE SUPPORT SPECS NEEDED:




- 20: SUPPORT TYPE / SIZE (C-CHANNEL SHOWN)
- 21: SUPPORT SPACING (EVERY OTHER PITCH SHOWN)
- 22: SUPPORT LENGTH

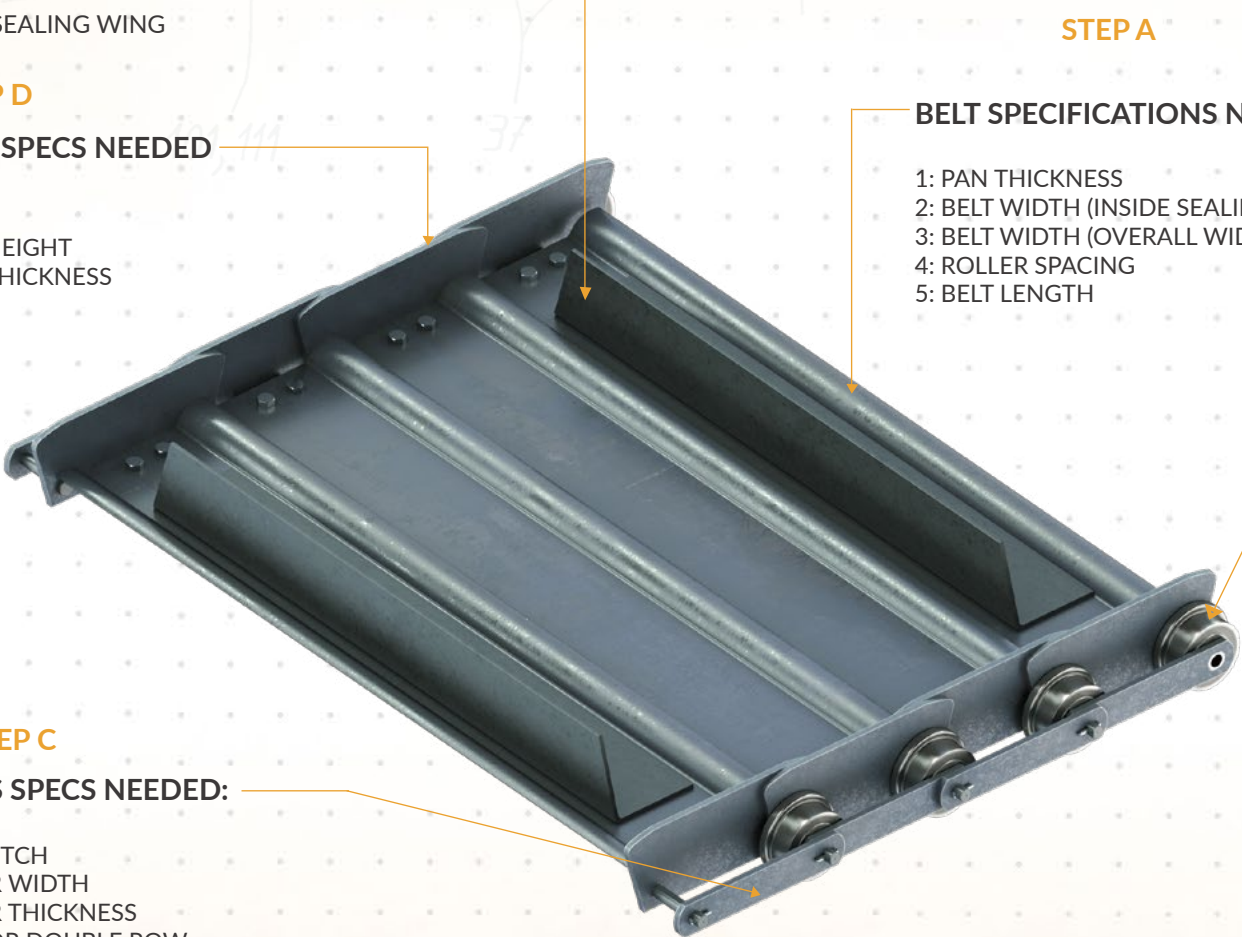

STEP A: BELT SPECS

BELT SPECS NEEDED:

- 1: PAN THICKNESS
- 2: BELT WIDTH (INSIDE SEALING WINGS)
- 3: BELT WIDTH (OVERALL WIDTH)
- 4: ROLLER SPACING
- 5: BELT LENGTH

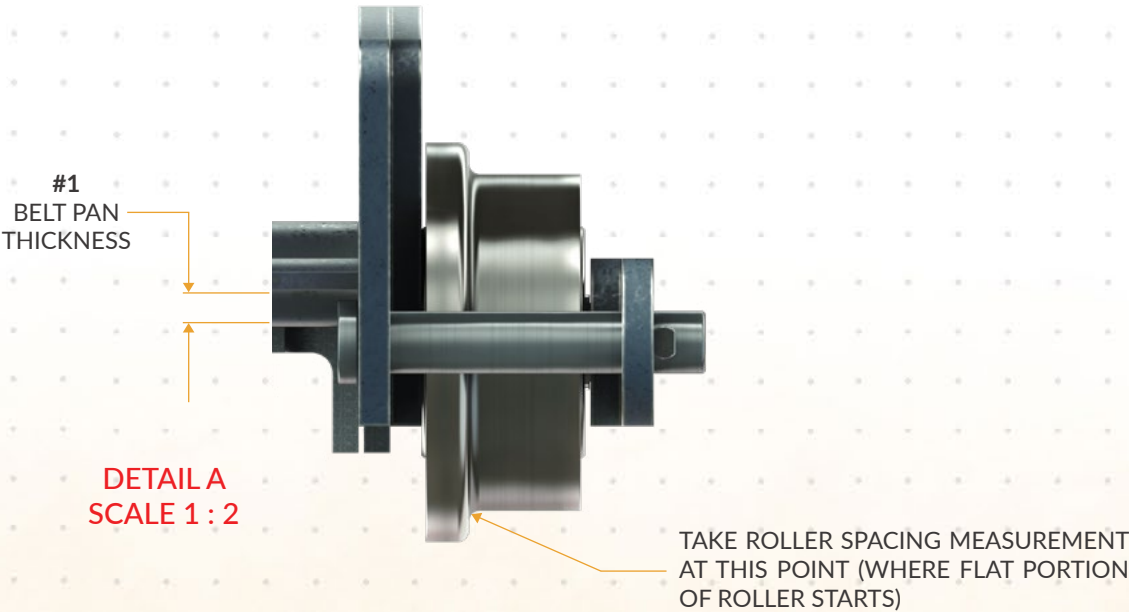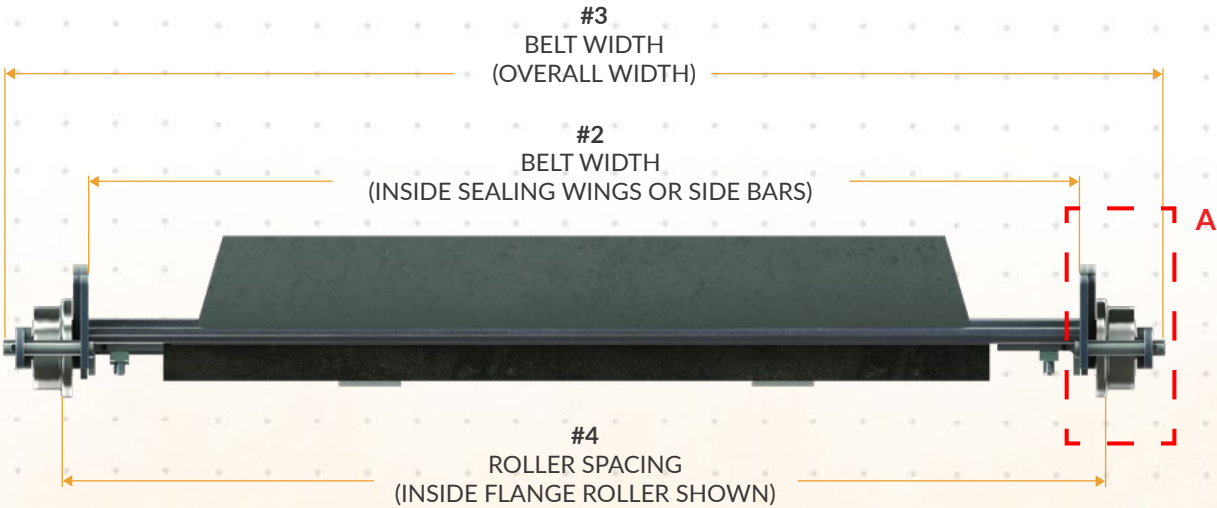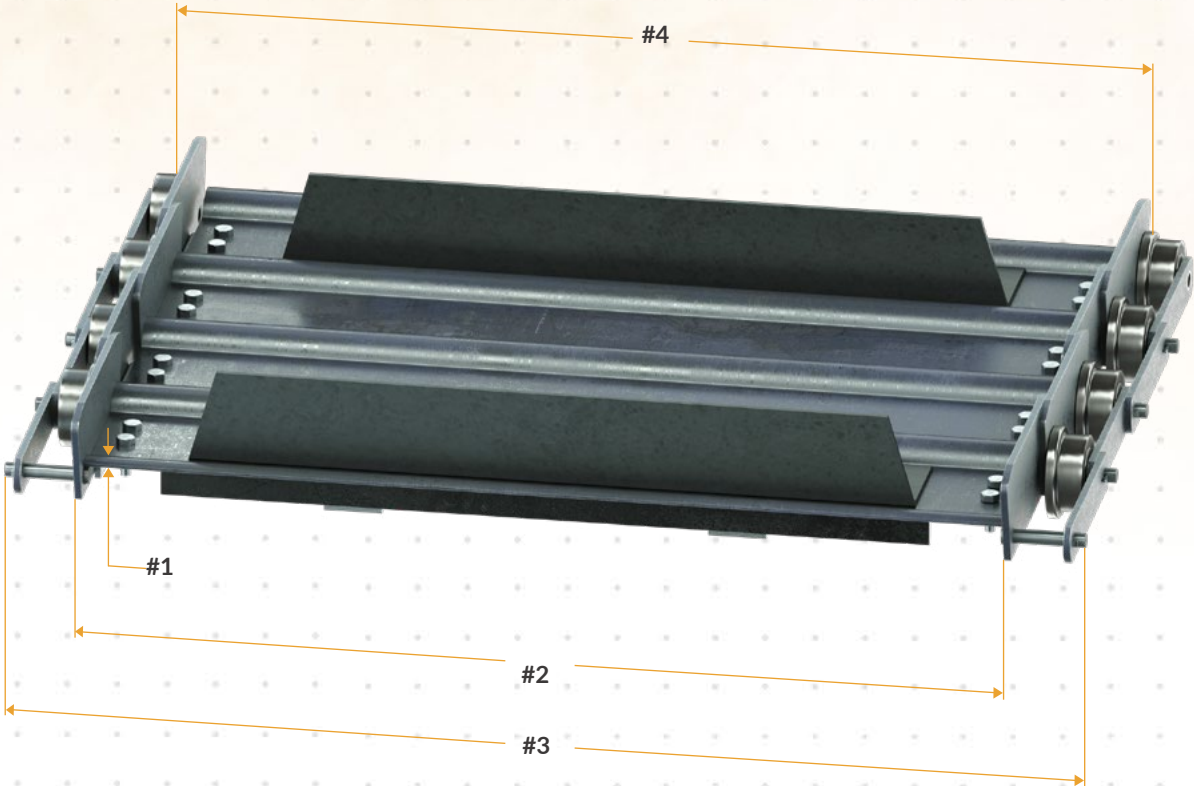

STEP B: ROLLER SPECS




ROLLER SPECS NEEDED:


- 6: ROLLER DIAMETER
- 7: FLANGED ROLLER DIAMETER (IF APPLICABLE)
- 8: ROLLER WIDTH
- 9: OVERALL ROLLER WIDTH (INCLUDES FLANGED ROLLER)



DETAIL B
SCALE 1 : 2

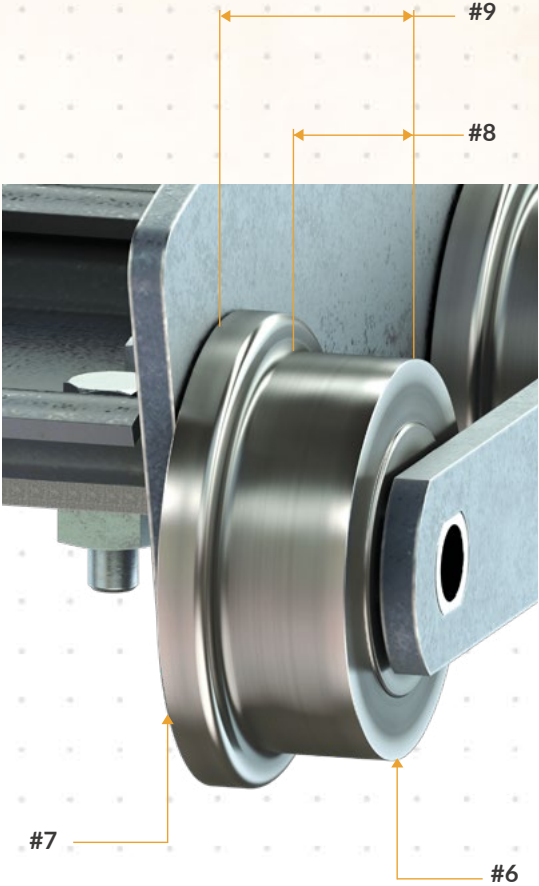

DETAIL C
SCALE 1 : 2

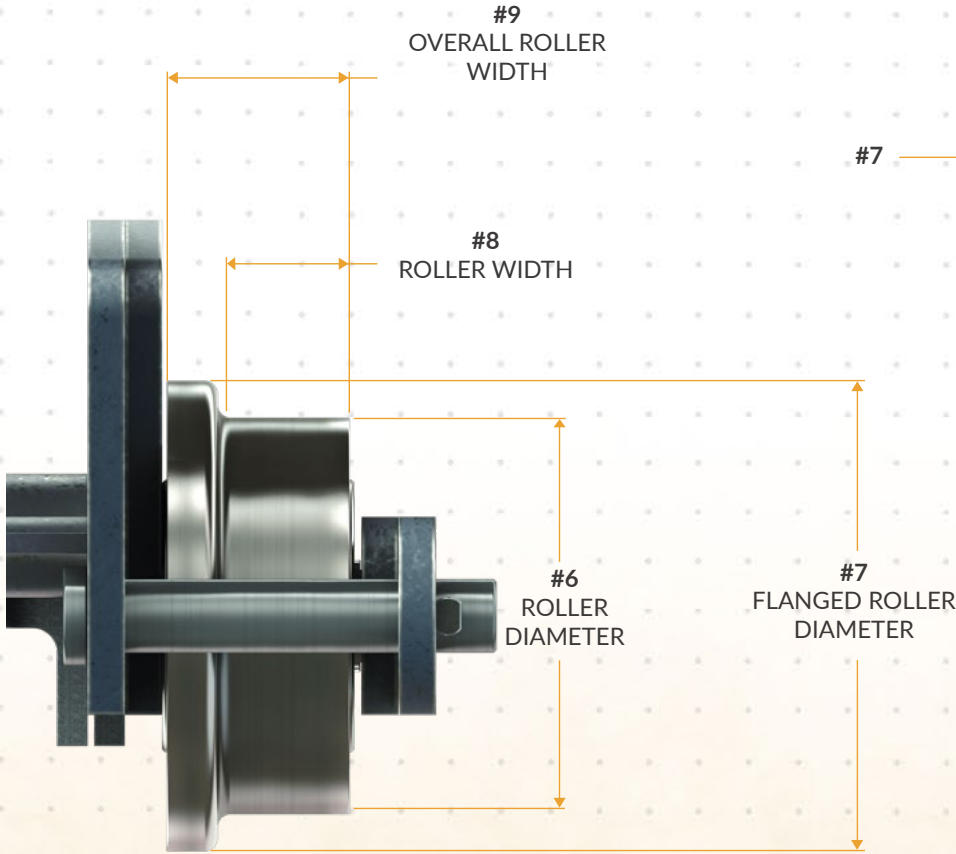


STEP C: SIDE BAR SPECS




SIDE BARS SPECS NEEDED:

- 10: CHAIN PITCH
- 11: SIDE BAR WIDTH
- 12: SIDE BAR THICKNESS
- 13: SINGLE OR DOUBLE CHAIN ROW

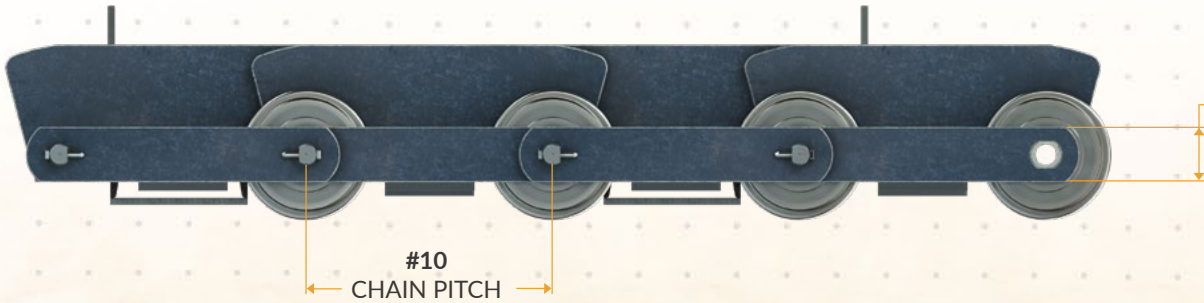

DETAIL D
SCALE 1 : 4

#13
SINGLE ROW
SHOWN

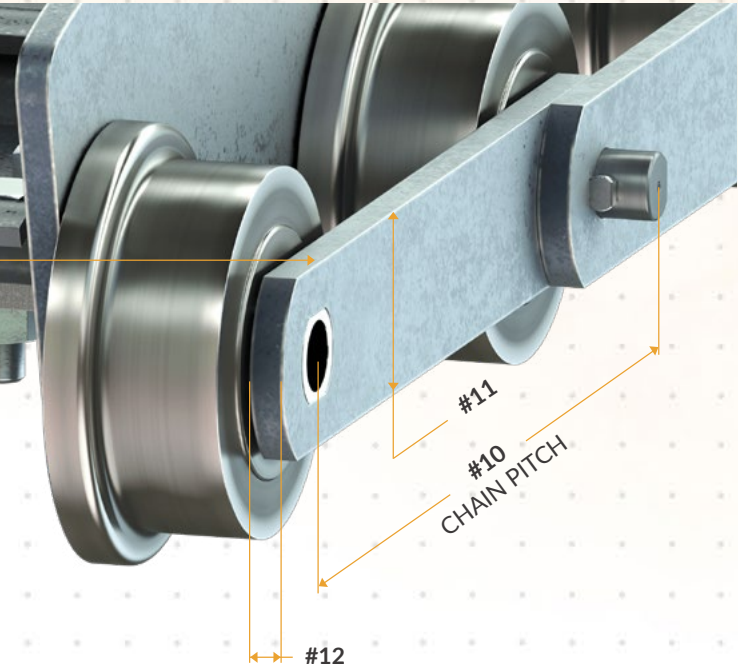


*SEALING WINGS
ARE NOT COUNTED AS
DOUBLE CHAIN ROW

#12
SIDE BAR
THICKNESS

*DOUBLE CHAIN
ROW WOULD
HAVE SECOND
SET ON INSIDE
OF ROLLERS
(NOT SHOWN)

#13
SINGLE CHAIN
ROW SHOWN



DETAIL E
SCALE 1 : 2

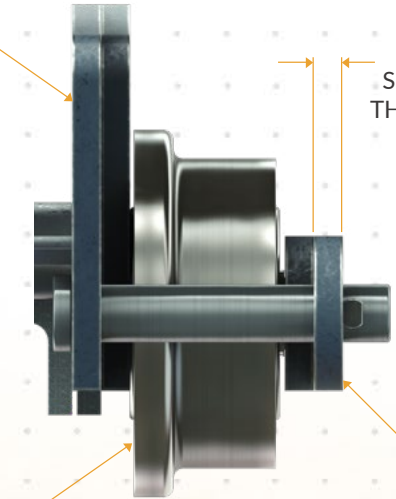

STEP D: SEALING WING SPECS

SEALING WINGS SPECS
NEEDED (IF APPLICABLE):

- 14: SEALING WING HEIGHT
- 15: SEALING WING THICKNESS

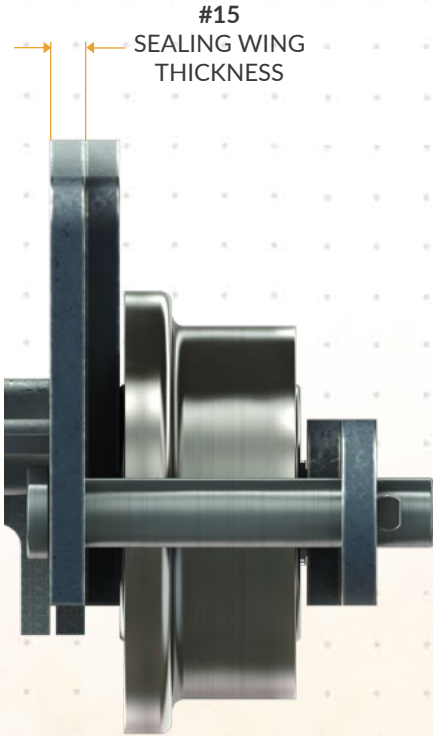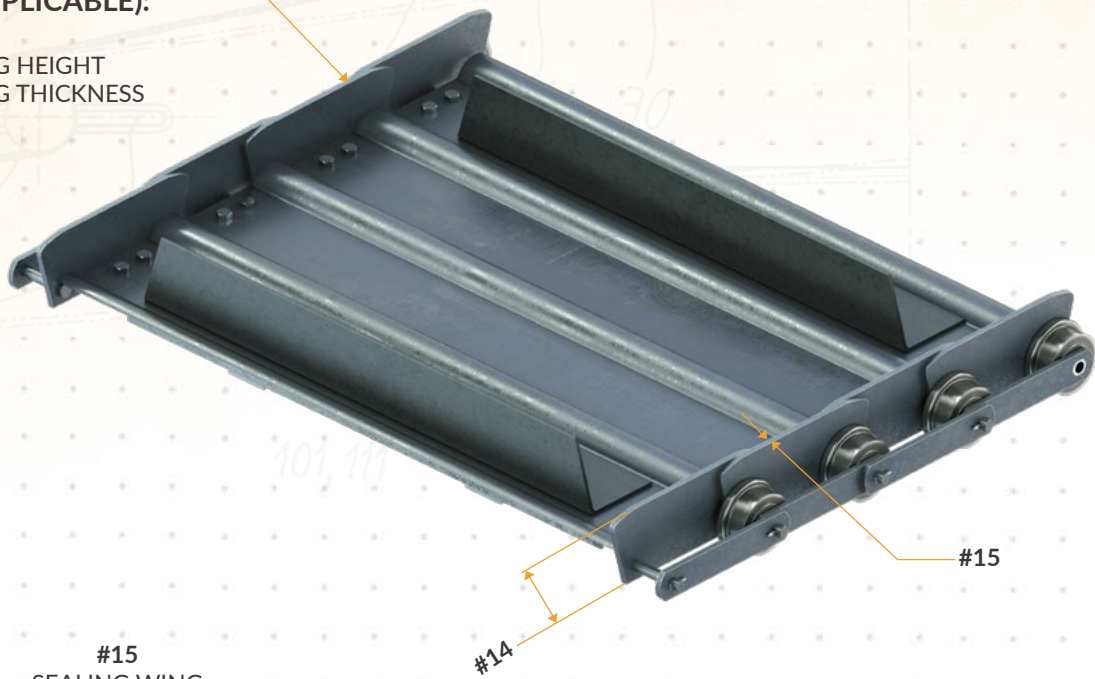

DETAIL F
SCALE 1 : 2



#14
SEALING WING HEIGHT
(MEASURED FROM ROLLER CL)





STEP E: CLEAT SPECS

CLEAT SPECS NEEDED (IF APPLICABLE):


- 16: HEIGHT OF CLEAT (ANGLE IRON SHOWN)
- 17: THICKNESS OF CLEAT
- 18: TOTAL LENGTH
- 19: OFFSET FROM SEALING WING




DETAIL G
SCALE 1 : 6

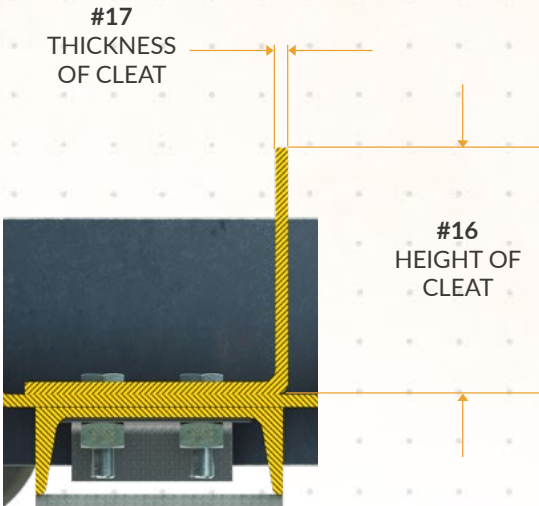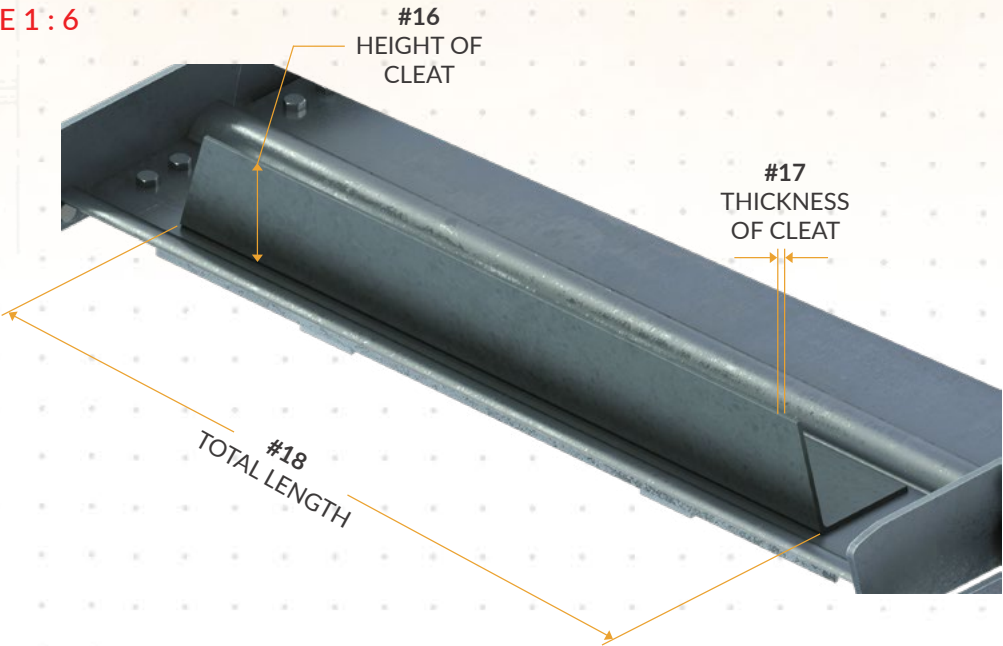

SECTION J-J
SCALE 1 : 3

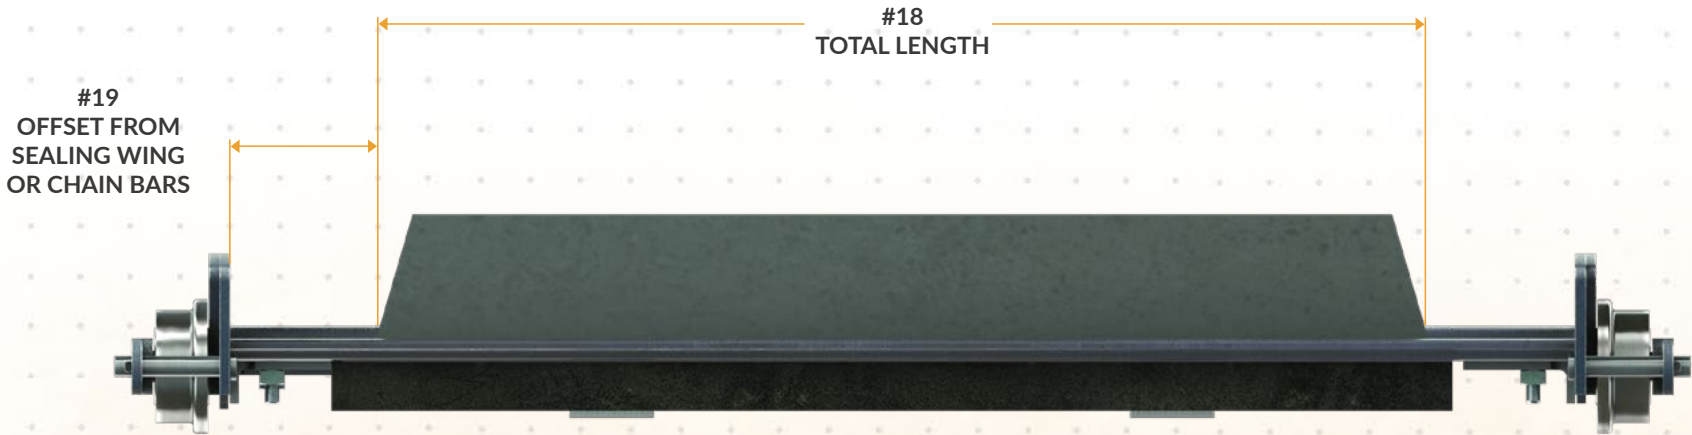

SECTION H-H
SCALE 1 : 5

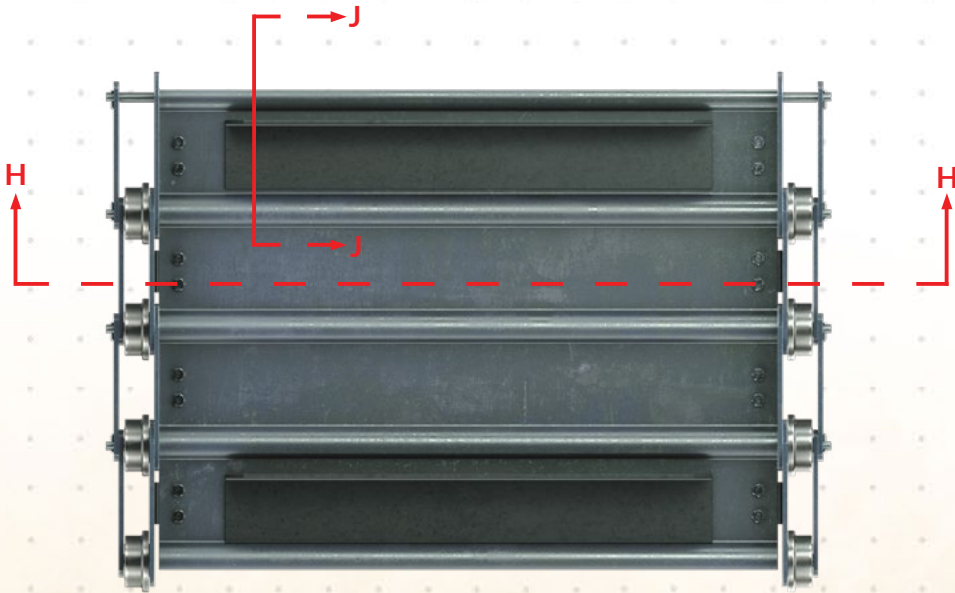

STEP F: BELT UNDERSIDE SUPPORT SPECS

BELT UNDERSIDE SUPPORT SPECS NEEDED:

- 20: SUPPORT TYPE / SIZE
(C-CHANNEL SHOWN)
- 21: SUPPORT SPACING
(EVERY OTHER PITCH SHOWN)
- 22: SUPPORT LENGTH



DETAIL K
SCALE 1 : 3




#20
C-CHANNEL SHOWN
(COULD BE ANGLE IRON
OR FLAT BAR)



#21
SUPPORT SPACING
EVERY OTHER
CHAIN PITCH SHOWN

#22
SUPPORT LENGTH

STEP G: BELT UNDERSIDE WEAR PAD SPECS

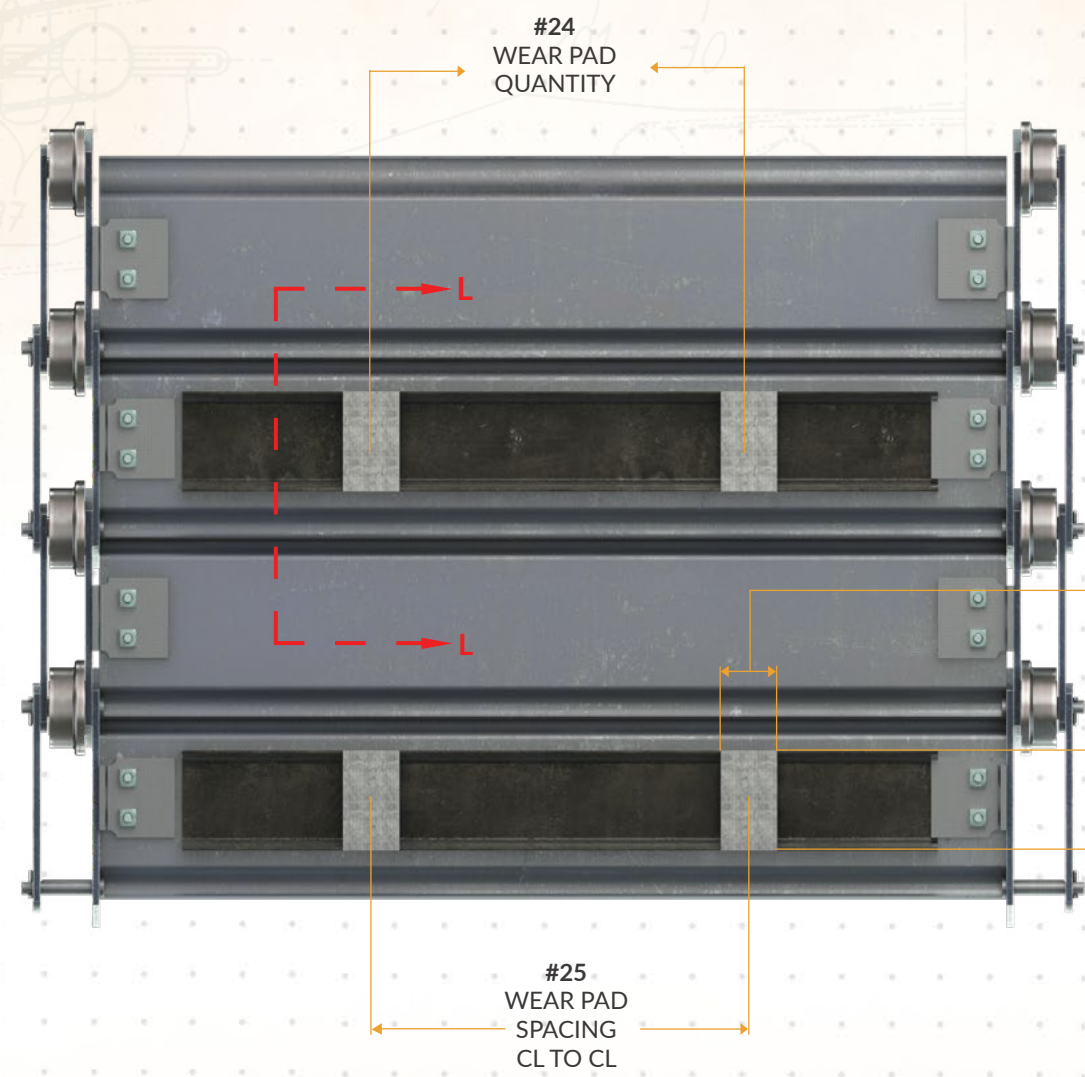

BELT UNDERSIDE WEAR PAD SPECS NEEDED:

- 23: WEAR PAD THICKNESS
- 24: WEAR PAD QUANTITY (TWO PER PITCH SHOWN)
- 25: WEAR PAD SPACING
- 26: WEAR PAD LOCATION
- 27: WEAR PAD SIZE LENGTH & WIDTH



SECTION L-L SCALE 1 : 3

#26
WEAR PAD LOCATION
(FROM ROLLER CL TO BOTTOM
OF WEAR PAD)

